TRERON LUMINAIRES INSTALLATION GUIDE

READ THE INSTRUCTIONS CAREFULLY BEFORE STARTING

INSIDE THE BOX

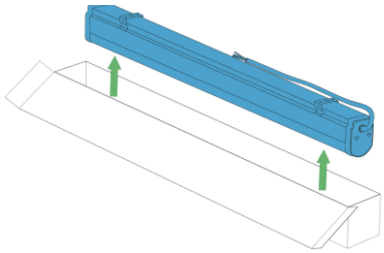

STANDARD VERSION (p.4)

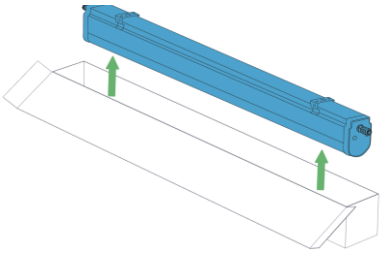

LINKABLE VERSION (p.4)

NEEDED FOR MOUNTING

SURFACE MOUNTING (p.2)



ROPE MOUNTING (p.3)

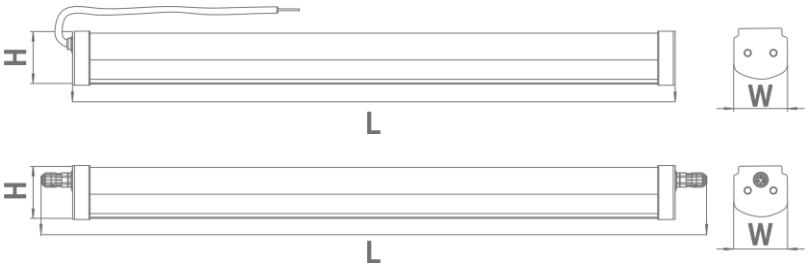

STANDARD/DALI/EMERGENCY VERSION

L, *mm*	W, *mm*	H, *mm*
600 / 1200	51	53

LINKABLE VERSION

L, *mm*	W, *mm*	H, *mm*
609 / 1209	51	53

WARNING

! Turn power off before inspection, installation or removal.

- Properly ground electrical enclosure.
- Perform installation in dry location only.
- Luminaire may fall down if not installed properly.
- Avoid direct eye exposure to the light source while it is on.
- For indoor use only.
- Do not operate luminaire with damaged parts.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- The manufacturer shall not be liable for any damage resulting from inappropriate modifications to the luminaire or faulty installation.

If you have any questions, contact the manufacturer.

© 2021, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.

TRERON LUMINAIRES INSTALLATION GUIDE

1. MOUNTING

1.1. SURFACE MOUNTING

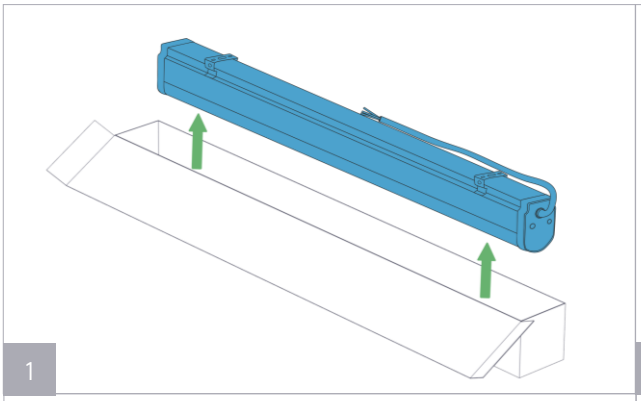

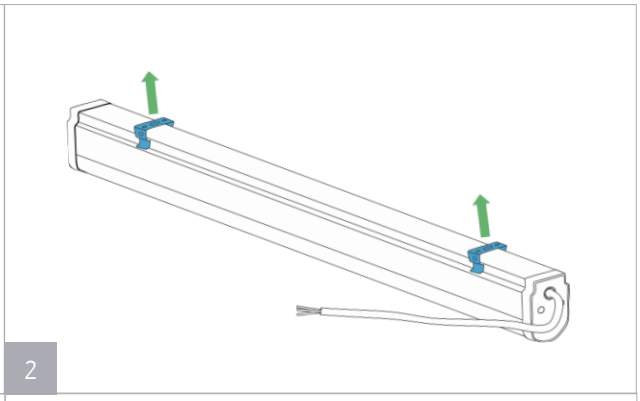

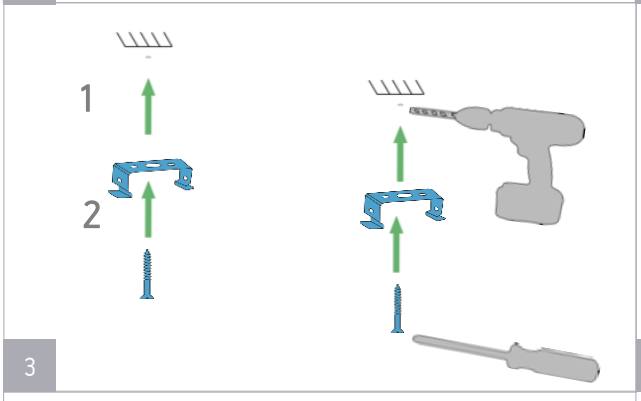

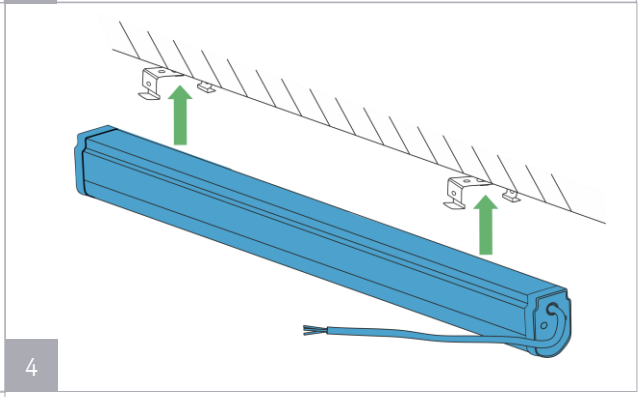

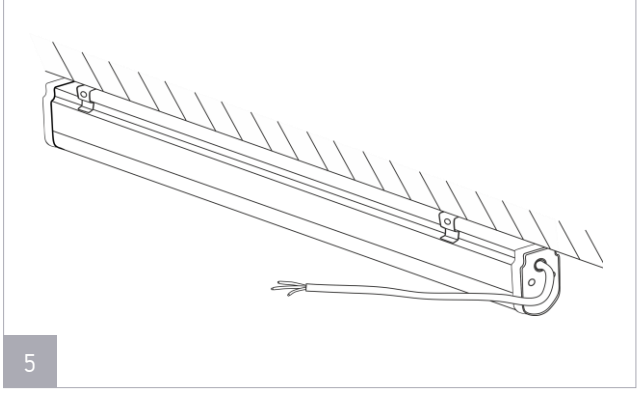

© 2021, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.

TRERON LUMINAIRES INSTALLATION GUIDE

1. MOUNTING

1.2. ROPE MOUNTING

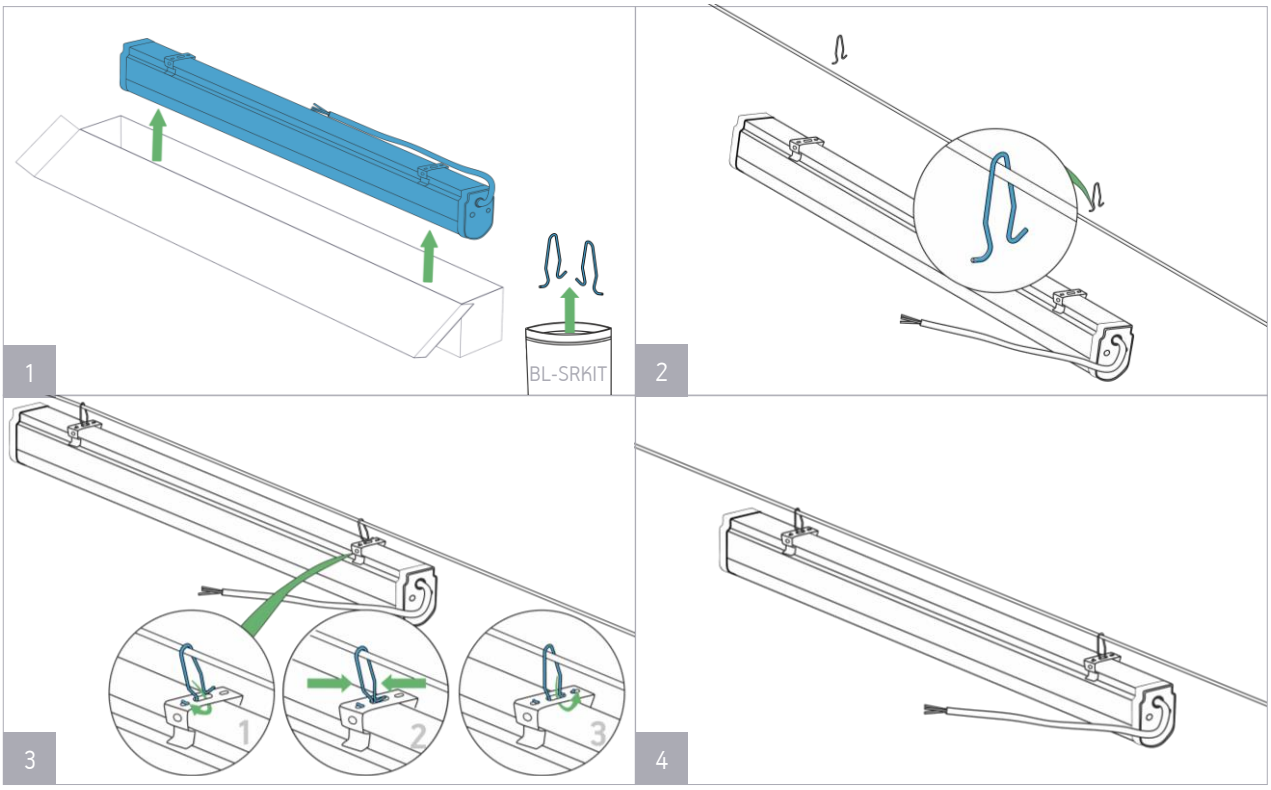

© 2021, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.

TRERON LUMINAIRES INSTALLATION GUIDE

2. CONNECTION

2.1. STANDARD CONNECTION

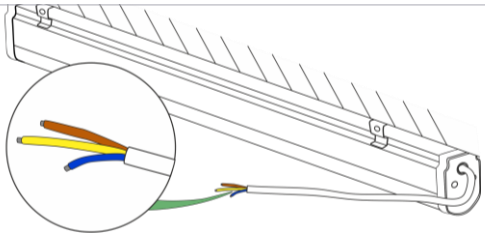

CONNECTION SCHEME

(L)– line (brown) (N) – neutral (blue) (PE) – protective earth (green/yellow)

2.3. DALI/EMERGENCY CONNECTION

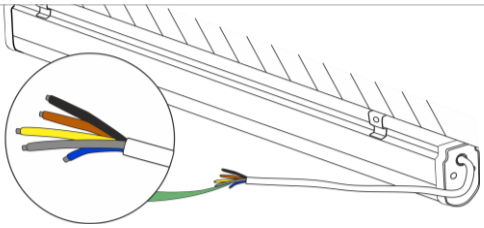

DALI CONNECTION SCHEME

(L) - line (brown) (N) - neutral (blue) (PE) - protective earth (green/yellow)
DALI(-) (grey) DALI(+) (black)

EMERGENCY CONNECTION SCHEME

(L) - line (brown) (N) - neutral (blue) (PE) - protective earth (green/yellow)
EMERGENCY(-) (grey) EMERGENCY(+) (black)

2.3. LINKABLE CONNECTION

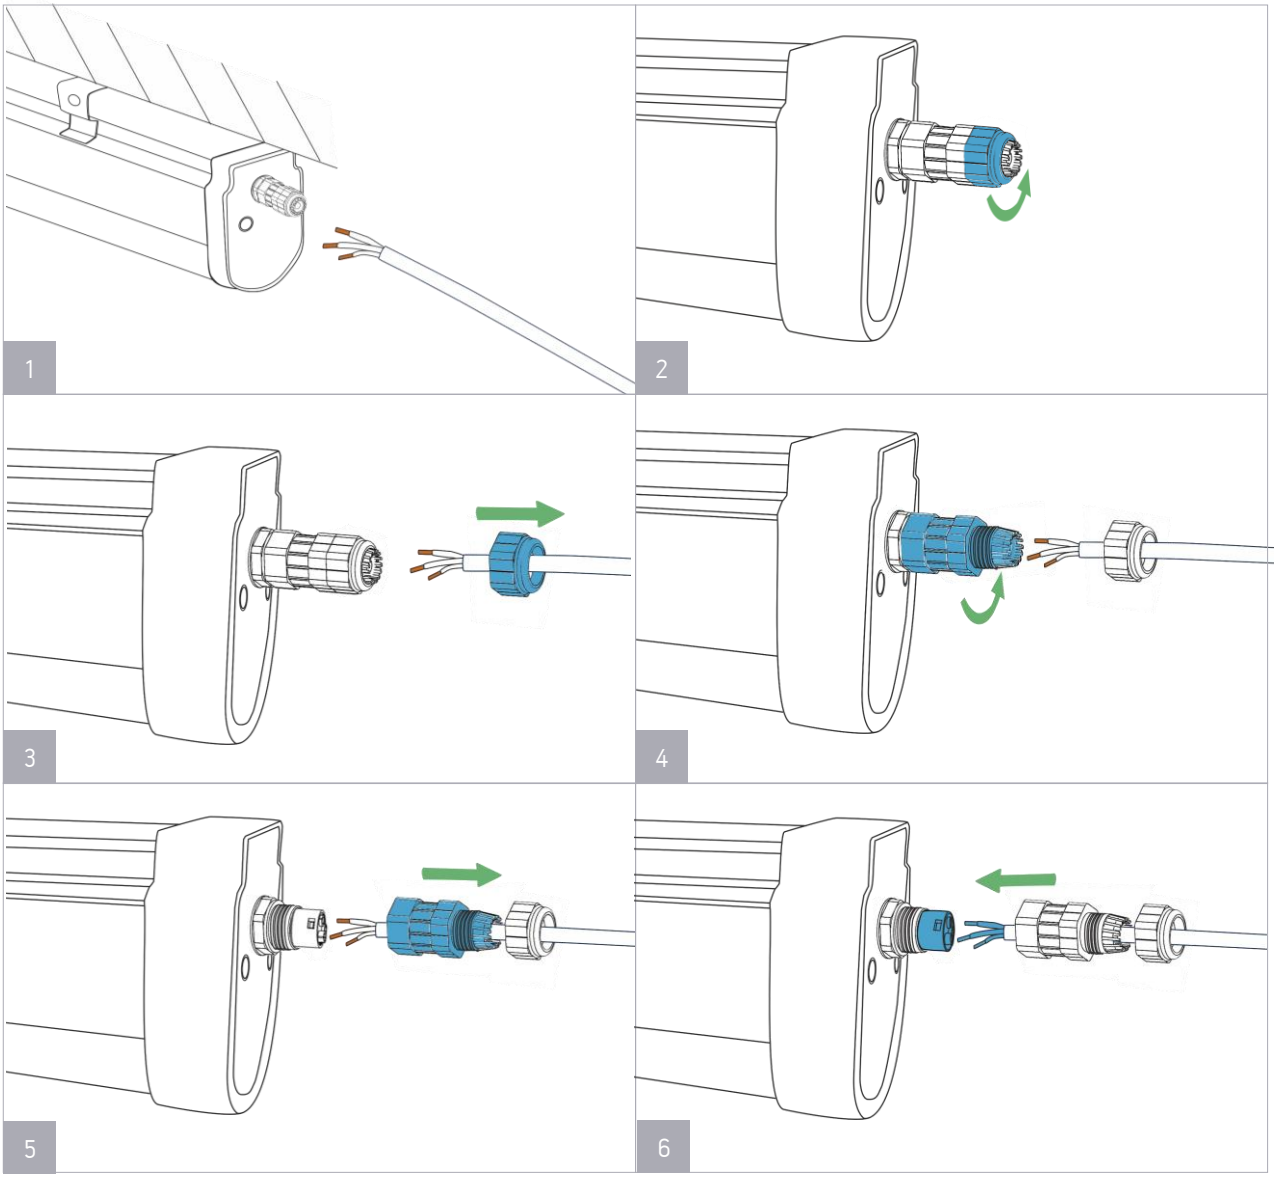

© 2021, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.

TRERON LUMINAIRES INSTALLATION GUIDE

2.3. LINKABLE CONNECTION

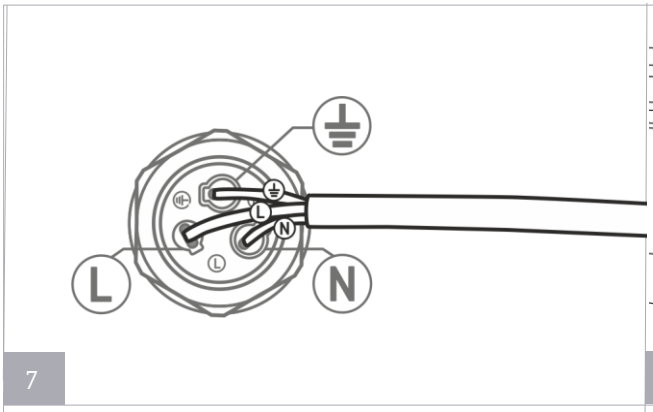

7

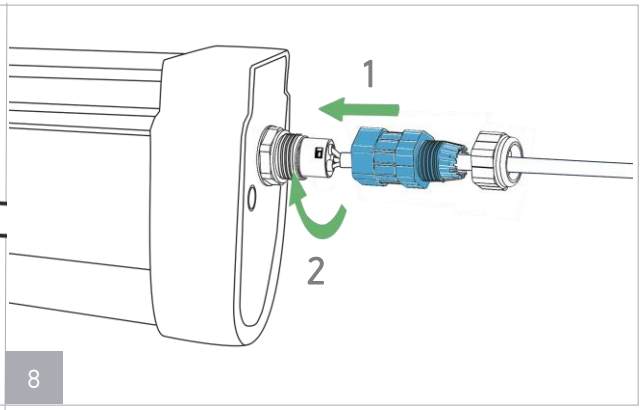

8

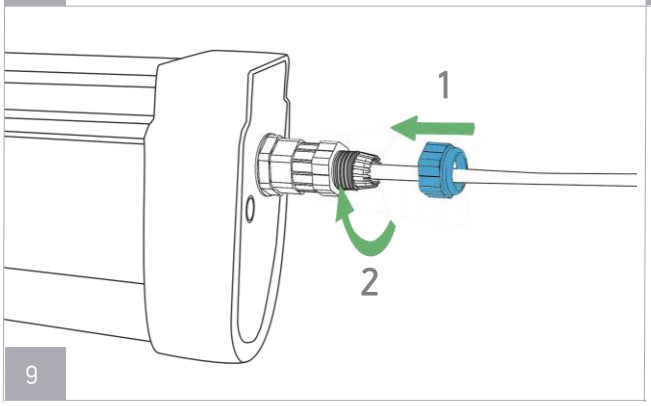

9

QUANTITY OF LUMINAIRES PER CIRCUIT BREAKER

SKU	LUMINAIRE QTY PER 16A TYPE C CIRCUIT BREAKER
BWLP-BL-060A120840E16	210
BWLP-BL-060A120840E16-TR	210
BWLP-BL-060A120840E16-DA	210
BWLP-BL-060A120840E20	160
BWLP-BL-060A120840E20-TR	160
BWLP-BL-060A120840E20-DA	160
BWLP-BL-120A120840E24	130
BWLP-BL-120A120840E24-TR	130
BWLP-BL-120A120840E24-EM3H	130
BWLP-BL-120A120840E24-DA	130
BWLP-BL-120A120840E32	100
BWLP-BL-120A120840E32-TR	100
BWLP-BL-120A120840E32-EM3H	100
BWLP-BL-120A120840E32-DA	100

SKU	LUMINAIRE QTY PER 16A TYPE C CIRCUIT BREAKER
BWLP-BL-120A120840E40	80
BWLP-BL-120A120840E40-TR	80
BWLP-BL-120A120840E40-EM3H	80
BWLP-BL-120A120840E40-DA	80
BWLP-BL-120A120840E55	60
BWLP-BL-120A120840E55-TR	60
BWLP-BL-120A120840E55-EM3H	60
BWLP-BL-120A120840E55-DA	60

© 2021, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.