

LED EMERGENCY MODULE



Emergency luminaires are designed to provide adequate lighting in the event of an emergency or power failure. It can provide up to 180 minutes of illumination for the rated wattage upon loss of AC power.

GENERAL INFORMATION

SUPPLY VOLTAGE	220-240V; 50Hz
EMERGENCY AUTONOMY	2/3 hours
IP CLASS	IP65
OPERATING TEMP.	+10 °C ~ +50 °C
INSTALLATION OPTIONS	surface / recessed / suspended
CERTIFICATION	CE


ORDERING INFORMATION



MODULE Type 1

SKU	OPTICS	TEST	EMERGENCY AUTONOMY	POWER CONSUMPTION, W (while charging)	LUMEN OUTPUT, LM	DIMENSIONS, MM
BEMP-AP-T1-3H190E5-S0	open spaces	auto-test	3 h	5	190	269x144x42
BEMP-AP-T1-3H450E9-S0	open spaces	auto-test	3 h	9	446	269x144x42
BEMP-AP-T1-2H730E12-S0	open spaces	auto-test	2 h	12	732	269x144x42
BEMP-AP-T1-2H530E10-S0H	open spaces high	auto-test	2 h	10	525	269x144x42
BEMP-AP-T1-3H480E10-SCH	corridor type high	auto-test	3 h	10	477	269x144x42

MOUNTING ACCESSORIES for type1

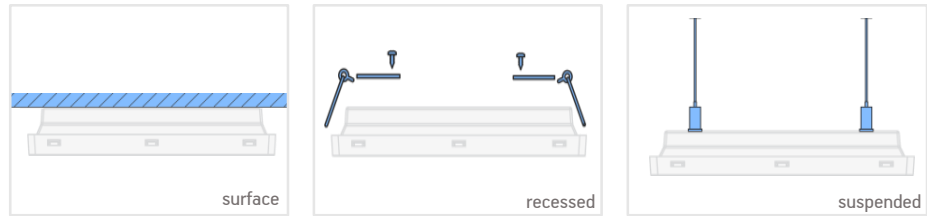

SKU	DESCRIPTION
BEMP-RE-KIT	Recessed mounting kit for type 1 emergency modules
BEMP-SU-KIT	Suspended mounting kit for type 1 emergency modules

MODULE Type 2



SKU	OPTICS	TEST	EMERGENCY AUTONOMY	POWER CONSUMPTION, W (while charging)	LUMEN OUTPUT, LM	DIMENSIONS, MM
BEMP-AP-T2-3H100E4	open spaces	manual	3 h	4	104	352x110x73

LED EMERGENCY LIGHTING OPTIONS

SURFACE MOUNTED EMERGENCY DOWNLIGHT

SUPPLY VOLTAGE	230V; 50Hz
IP CLASS	IP41
OPERATING TEMP.	+10 °C ~ +40 °C
INSTALLATION OPTIONS	surface
CERTIFICATION	CE



BEMP-AP-T3-3H140I3-S0-SM



BEMP-AP-T3-3H180I3-SC-SM

FIXTURE Type 3

SKU	OPTICS	TEST	EMERGENCY AUTONOMY	POWER CONSUMPTION, W (while charging)	LUMEN OUTPUT, LM	DIMENSIONS, MM
BEMP-AP-T3-3H140I3-S0-SM	open spaces	manual	3 h	3	143	ø150x44
BEMP-AP-T3-3H180I3-SC-SM	corridor type	manual	3 h	3	175	ø150x44

RECESSED MOUNTED EMERGENCY DOWNLIGHT

SUPPLY VOLTAGE	230V; 50Hz
IP CLASS	IP20
OPERATING TEMP.	+10 °C ~ +40 °C
INSTALLATION OPTIONS	recessed
CERTIFICATION	CE



BEMP-AP-T3-3H200I2-S0



BEMP-AP-T3-3H180I2-SC

FIXTURE Type 3

SKU	OPTICS	TEST	EMERGENCY AUTONOMY	POWER CONSUMPTION, W (while charging)	LUMEN OUTPUT, LM	DIMENSIONS, MM
BEMP-AP-T3-3H200I2-S0	open spaces	manual	3 h	3	200	ø70x49
BEMP-AP-T3-3H180I2-SC	corridor type	manual	3 h	3	180	ø70x49

EVACUATION LIGHTING OPTIONS



GENERAL INFORMATION

SUPPLY VOLTAGE	230V; 50Hz
OPERATING TEMP.	+10 °C ~ +55 °C
INSTALLATION OPTIONS	Surface / Wall / Suspended
CERTIFICATION	CE




BEMP-EV-T1-EXIT-WM



BEMP-EV-T1-GC-WM



BEMP-EV-T2-EXIT-WM



BEMP-EV-T2-GC-WM



BEMP-EV-T5-EXIT-WM

WALL MOUNTED MODULE

SKU	IP	TEST	EMERGENCY AUTONOMY	POWER CONSUMPTION, W (while charging)	VISIBILITY	DIMENSIONS, MM
BEMP-EV-T1-EXIT-WM	65	manual	1 h	1.5	24 m	269x144x42
BEMP-EV-T1-GC-WM	65	manual	1 h	1.5	24 m	269x144x42
BEMP-EV-T2-EXIT-WM	65	manual	3 h	4	20 m	352x110x73
BEMP-EV-T2-GC-WM	65	manual	3 h	4	20 m	352x110x73
BEMP-EV-T5-EXIT-WM	44	manual	3 h	1	25 m	299x206x43

Legend

EXIT – evacuation sign

GC – fire hose sign



BEMP-EV-T1-EXIT-SM



BEMP-EV-T3-EXIT-SM



BEMP-EV-T5-EXIT-SM

CEILING MOUNTED MODULE

SKU	IP	TEST	EMERGENCY AUTONOMY	POWER CONSUMPTION, W (while charging)	VISIBILITY	DIMENSIONS, MM
BEMP-EV-T1-EXIT-SM	65	manual	1 h	1.5	24 m	269x144x42
BEMP-EV-T3-EXIT-SM	65	auto-test	3 h	4	30 m	352x196x110
BEMP-EV-T5-EXIT-SM	44	manual	3 h	1	25 m	299x206x43



BEMP-EV-T1-EXIT-SP



BEMP-EV-T3-EXIT-SP



BEMP-EV-T5-EXIT-SP

SUSPENDED MODULE

SKU	IP	TEST	EMERGENCY AUTONOMY	POWER CONSUMPTION, W (while charging)	VISIBILITY	DIMENSIONS, MM
BEMP-EV-T1-EXIT-SP	65	manual	1 h	1.5	24 m	269x144x42
BEMP-EV-T3-EXIT-SP	65	auto-test	3 h	4	30 m	352x196x110
BEMP-EV-T5-EXIT-SP	44	manual	3 h	1	25 m	299x206x43