

LINELIT STRIP



ITEM DESCRIPTION

Flexible LED strips with 112 new generation LEDs reaching up to 160 lm/w efficacy. Comes with double-sided tape for easy peel and use; the low temperature on metal profiles and a popular power option 10 watts per meter. Made from high-quality electronic components ensuring a long lifetime of up to 75 000 h (L80) with 5 years warranty.

APPLICATION


- Aluminium profiles
- Side lighting
- Signs
- General lighting
- Office lighting

FEATURES & BENEFITS


- 5-years warranty
- Durable thermal conductive double-sided adhesive tape
- Compact 10/12 mm width
- Low temperatures on metal profiles

GENERAL SPECIFICATIONS

SUPPLY VOLTAGE	24 VDC
WATTS PER METER	10 W
CRI	80
LEDs PER METER	112
CUTTING STEP	62.5 mm
BINNING	3 SDCM
COLOUR / CCT	6500 K
OPERATING TEMPERATURE	-20 °C ~ +60 °C
STORAGE TEMPERATURE	+5 °C ~ +70 °C
CERTIFICATION	CE and RoHS compliant, UL certified
IP CLASS	IP 20 IP 67
LIFETIME	L80 75,000 h
WARRANTY	5 years
MOUNTING OPTIONS	double-sided tape

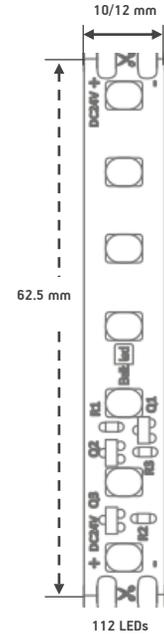

DIMENSIONS, MM

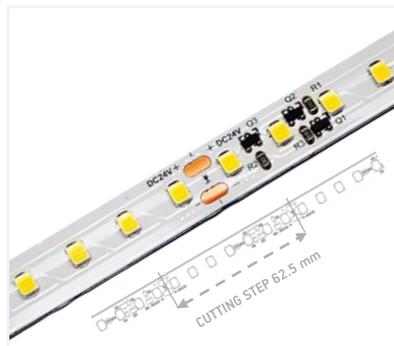

IP 20 | 112 LEDs



IP 67 | 112 LEDs

ORDERING INFORMATION

SKU	IP CLASS	STRIP WIDTH	CUTTING STEP, MM	COLOUR	POWER per METER, W	LUMEN OUTPUT, LM
BLSP-LE112830I10	IP 20	10	62.5	3000 K	10.0	1348
BLSP-LE112865I10	IP 20	10	62.5	6500 K	10.0	1424
BLSP-LE112830E10	IP 67	12	62.5	3000 K	10.0	1237
BLSP-LE112865E10	IP 67	12	62.5	6500 K	10.0	1307

* Pre-order products will be available only with MOQ from 100 meters, lead time 4 – 5 weeks. For precise lead time, contact your Customer Service manager.

PACKAGING INFORMATION

	METERS per REEL	REELS per BOX	LENGTH per BOX, M	WEIGHT per BOX, kg
IP20	10	82	820	14.1
IP67	5	20	100	9.7